





Wärmetauscher Type FP-

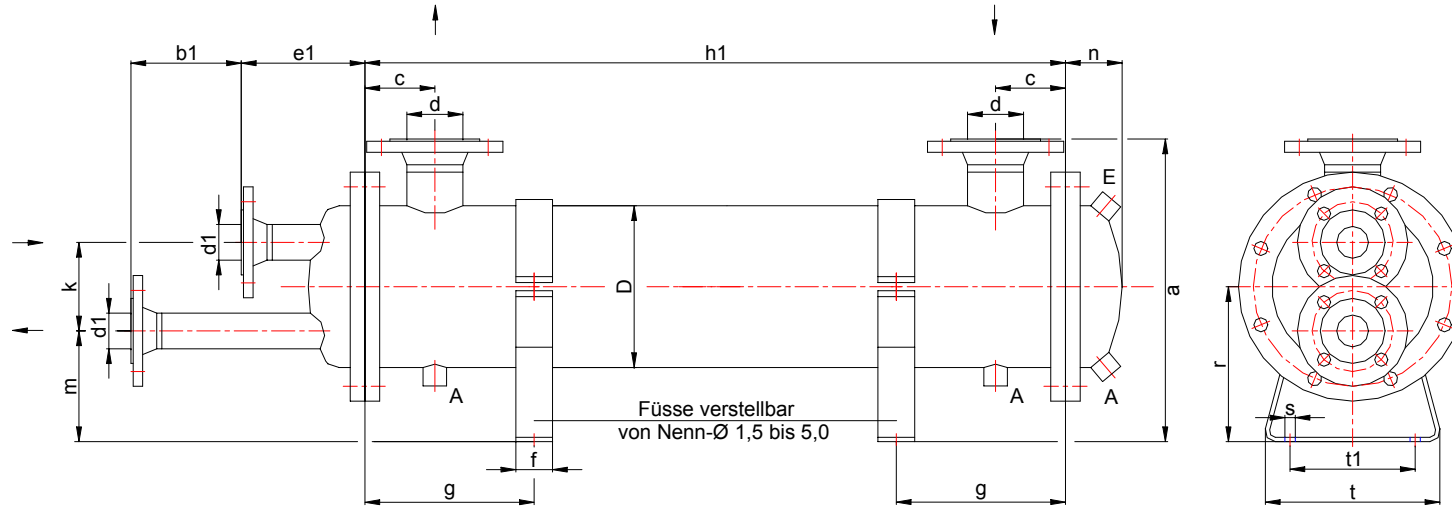

Nenn-Ø	1,5	1,75	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0	7,5	8,0	9,0
Ø D	168,3	193,7	219,1	273	323,9	355,6	406,4	457,2	508	550	600	650	700	750	800	900
d	DN 50	DN 65	DN 65	DN 65	DN 80	DN 100	DN 100	DN 125	DN 125	DN 150	DN 150	DN 200	DN 200	DN 250	DN 250	DN 250
d1	DN 25	DN 32	DN 40	DN 50	DN 80	DN 80	DN 100	DN 125	DN 125	DN 150	DN 150	DN 150	DN 200	DN 200	DN 250	DN 250
m	140	145	150	175	190	195	205	220	250	260	265	280	300	320	345	385
b1	120	130	150	160	180	-	-	-	-	-	-	-	-	-	-	-
c	90	95	95	95	115	125	125	145	150	170	170	200	200	230	240	250
n	70	75	80	95	110	115	125	135	150	155	170	180	190	200	210	240
a	370	390	410	490	550	590	630	690	770	810	850	930	970	1030	1090	1190
e1	150	160	170	190	210	220	230	235	255	275	285	295	300	310	340	360
k	100	110	120	150	180	210	230	260	280	300	330	380	380	400	410	430
r	190	200	210	250	280	300	320	350	390	410	430	470	490	520	550	600
f	50	50	50	60	60	60	60	60	70	75	75	75	75	85	85	85
g min	215	230	230	235	260	280	280	320	330	370	370	430	430	490	500	510
t	190	220	240	300	340	400	440	490	520	550	600	650	700	750	800	900
t1	120	150	170	220	260	300	340	390	420	480	520	570	620	670	720	820
s	14	14	14	14	14	18	18	18	18	18	23	23	23	23	23	23

E = Entlüftung
 A = Ablass

Typenschlüssel:

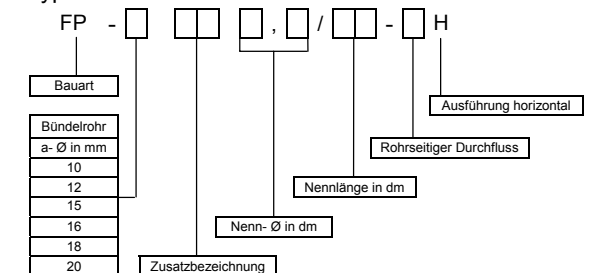

Nennlänge in dm	5	8	10	13,3	16	18	20	23,3	26,6	30	33	36	40
Länge h1 in mm	500	800	1000	1330	1600	1800	2000	2330	2660	3000	3300	3600	4000

Flanschanschlussmaße nach DIN 2501
 bis DN 150 = PN 16
 über DN 150 = PN 10

Massabweichungen vorbehalten