




Wärmetauscher Type W-


Typenschlüssel:

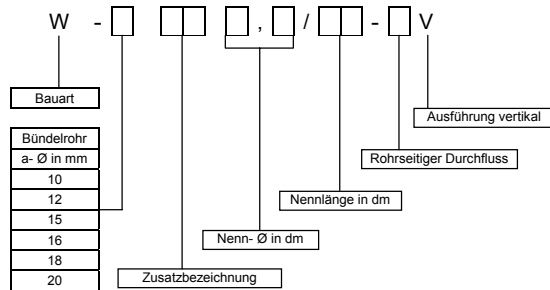

Flanschanschlussmaße
 nach DIN 2501
 bis DN 150 = PN 16
 über DN 150 = PN 10

Nenn-Ø	1,5	1,75	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0	7,5	8,0	9,0
Ø D	168,3	193,7	219,1	273	323,9	355,6	406,4	457,2	508	550	600	650	700	750	800	900
Ø D1	260	285	310	365	415	470	510	565	615	670	730	760	810	860	915	1015
Ø D2	220	245	270	325	375	410	460	510	560	610	660	715	765	810	870	970
d	DN 50	DN 65	DN 65	DN 65	DN 80	DN 100	DN 100	DN 125	DN 125	DN 150	DN 150	DN 200	DN 200	DN 250	DN 250	DN 250
d1	DN 25	DN 32	DN 40	DN 50	DN 80	DN 80	DN 100	DN 125	DN 125	DN 150	DN 150	DN 150	DN 200	DN 200	DN 250	DN 250
b	240	240	260	300	310	340	415	415	495	500	550	550	605	605	685	685
c	90	95	95	95	115	125	125	145	150	170	170	200	200	230	240	250
e	120	120	130	150	150	160	205	205	245	250	270	270	295	295	335	335
m	140	145	150	175	190	195	205	220	250	260	265	280	300	320	345	385
r	190	200	210	250	280	300	320	350	390	410	430	470	490	520	550	600
n	90	95	100	115	130	135	145	155	170	175	190	200	210	220	230	260
s	14	14	14	14	14	18	18	18	18	18	23	23	23	23	23	23

Nennlänge in dm	5	8	10	13,3	16	18	20	23,3	26,6	30	33	36	40
Länge h1 in mm	452	752	952	1282	1552	1752	1952	2282	2612	2952	3252	3552	3952
Ausbaulänge in mm	500	800	1000	1330	1600	1800	2000	2330	2660	3000	3300	3600	4000

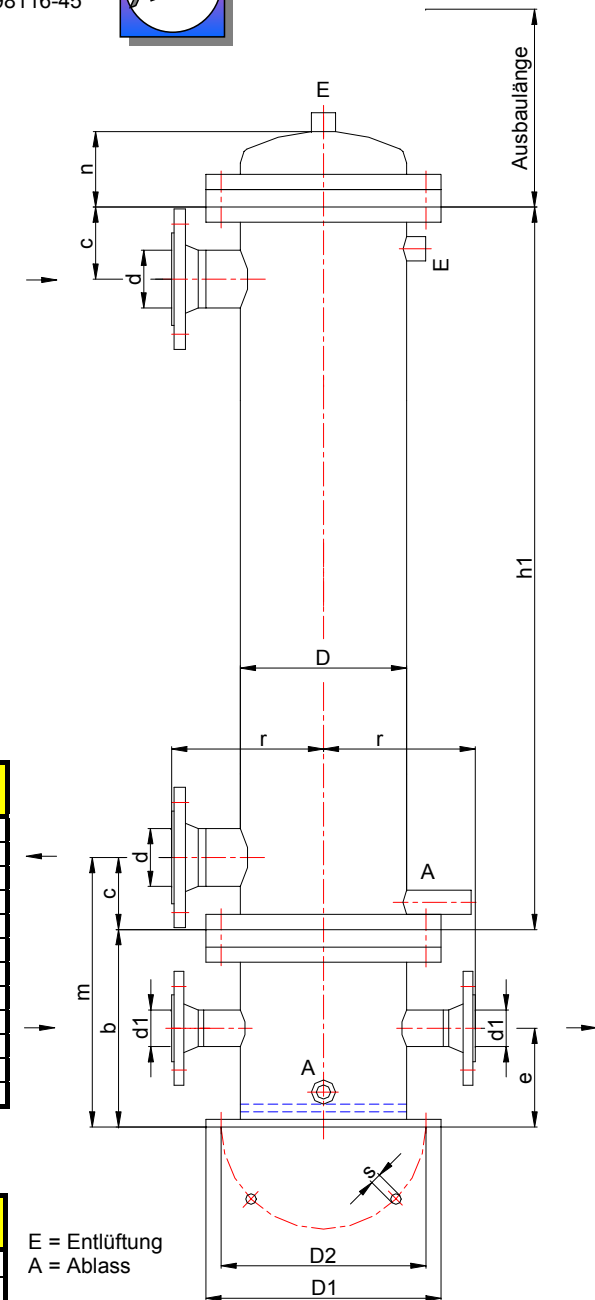

E = Entlüftung
 A = Ablass